A Multi Purpose, Adjustable, Easy to Use Maintenance Machine.

Like Your Own Personal Grounds Crew Built Into One Ultimate Machine!

Multi Groomer MG72

Golf & Turf

Groom Artificial & Natural Turf **Pulverize Aeration Cores** Incorporate Top Dressing **Groom Golf Greens** and More!



Fongue Towed Version

Versatile Tongue Towed Groomer.




MG72 Golf & Turi

Electric Lift Systems to Choose From

We Offer the Most Complete Line of "Operator Lift Control Systems" on the Market!

Shown Below is "Standard Equipment" When You Order the MG72 Groomer. Plus You Choose the Electric Lift System That's Best for You!

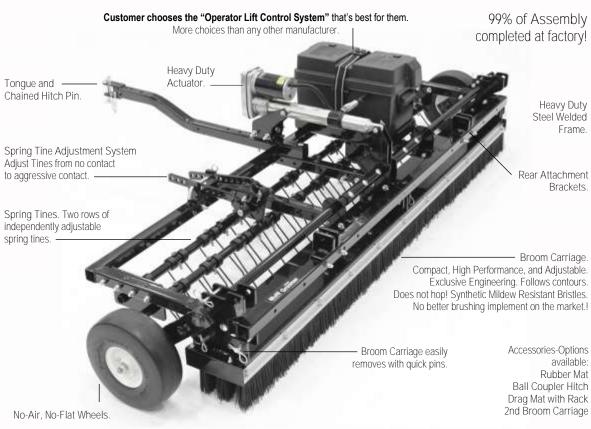

Helping Those Who Help Others Play!

Plus, accessories for Operator Lift Control systems!



Heying Company Alton, Iowa 51003 Ph. 712.756.8847 Fax 712.756.8849

www.HeyingCompany.com

Made in USA

UNMATCHED Ingineering

Optional Accessories

MGMT-7200

Magnet Optional Rear Magnet. 72" wide. Aluminum housing for Neodymium Rare Earth Magnets. Strongest available. Includes adjustable height anti scalp turf wheels. Removes ferrous debris while grooming.

If you're comparing groomers be sure to ask what type of magnets are used. For example: Other machines use less expensive



ceramic magnets. Our neodymium magnets are 10 times stronger than ceramic!

MGDM-8436

Drag Mat with Rack 84" wide x 36" deep steel drag mat.

Rack attaches to rear of frame.



Exclusive drag mat rack is welded construction.

Holds, carries and pulls drag mat.

Easy to attach & remove mat.



MGRM-7200

Rubber Mat

The 72" Rubber Mat.
May be desired as a
rear attachment.
Multi-purpose.
Heavy duty.

Welded frame.



AL-E-552 "HW"

partial wiring pkg.

If you order the

"HW" Lift System you

might want to wire an

additional tow

vehicle to pull the

groomer. Includes necessary wiring to

"Hard-Wire" one

additional tow machine.

Additional "HW" Additional Wireless

Transmitter for "WR" or "PW" Systems.

AL-F-098 Transmitter

For customers who have "WR" or "PW" Lift System. When you order consider an additional transmitter so you have an extra on hand.



We stock
Transmitters

Backup Electric Control Systems. Want Dual Controls.

Who needs a Backup Electric Control System?

Can't be broke down? Need peace of mind that you have a backup control system to operate the groomer if something happens to your original lift system, like a dead battery, misplaced transmitter, broken wire, etc.? Then consider a "backup" control that will bypass the entire original electric lift system except the cylinder. Choose a backup system that has temporary alligator clamps or ring terminals to connect to tow vehicle or groomer 12v battery.

AL-E-555 "SB" Backup

Most Popular Backup Control.

"SB" Corded Switch

Box Control System.

"SR" uses temporary

"SB" uses temporary alligator clamps to attach to your tow machine 12 volt battery and totally bypass the original system. See SB Wiring System for more details.



AL-E-**571 "PW" Backup**

"PW" Portable Wireless Control System.

"PW" uses temporary alligator clamps to attach to your tow machine 12 volt battery and totally bypass the original system.

See PW Wiring System for more details.



AL-E-589 "SG" Backup "SG" Corded Switch

Box Control System. "SG" connects to the 12 volt battery on the groomer with 3/8" Ring Terminals and can bypass the original system.

See SG Wiring System for more details.



MGCP-1875 (1-**7/8")**

MGCP-2000 (2")



Ball Coupler Hitch 1-7/8" or 2" Coupler sizes available. Easily mounts to end of tongue.

MG72 Multi Groomer. Manufactured with "versatility" in mind.

Adjustable. Easy to Use. Easy to maintain.




One of a kind Broom Design.

Easily attaches with clevis pins and safety clips.

(No Tools Needed). Will not hop.

Brackets allow Broom to be set at different angles.






Increase Brushing Action. Add a 2nd Broom Carriage to Front.
The MG72 is designed to accept a second Broom Carriage in front (Tines Removed) to increase Brushing Action.

The MG72 will accept a second 6-brush broom carriage at the front on the frame if the Spring Tines are removed. This additional Broom Carriage increases the brushing action. Front Universal Carriage Brackets are similar to the rear

brackets but are shorter and have two rows of holes to alternate the direction in which they can be mounted (bolted) to the frame.







Tine Adjustment System. Easy to choose and set to make the amount of contact desired.



Tongue Hitch Adaptor (included).
Adjust Tongue Height.



Extra Pin Storage at each end of machine by axle.



Unmatched Versatility!


Use the same machine to Brush, Incorporate and Pulverize. Useful all year long.



Brushing (or Grooming) Greens during the season (before mowing) has many benefits. Helps Develop Truer, More Consistent Ball Roll and Healthier Turf.

- Stands up turf so mower can cut at the intended height.
- Denser turf develops by removing horizontal blades.
- Ball Roll becomes more consistent and denser.
- New blade growth is encouraged by removing the horizontally growing blades for healthier turf.
- Brushing helps loosen debris that's embedded in canopy.
- Helps Deter Grain (memory) that develops from constant mowing.

Edge of "Mower Cut Line" shows long blades lifted and un-cut and the newly cut turf (at right), after brushing.





- Light, Medium or Heavy Top Dressing - nothing incorporates like the MG72.
- It's 6 ft. wide, so it's Fast & Efficient.
- It's Easy to Adjust.
- It Doesn't Hop!

If you spread light top dressing on greens during the year the MG72 makes quick work of incorporating it into the canopy helping promote vertical growth and improving ball roll and mowing consistency.



- Pulverize Aeration Cores

 Core then Pulverize
- Pulverizes Aeration Cores.
 5 to 10 minutes per green you're ready to mow.
- Save Labor, Reduce "Down-Time".
- No Need to "Verti-Cut" or drag with other tools.
- Leaves Behind only the Grass Tufts, which are cleaned up easily by a greens mower, and you're ready to spread top dressing.
- Remove Less Material from Greens.
- Less Top Dressing used.
- Helps Remove Thatch while you pulverize cores if desired. Tines can be adjusted so they only make contact with the cores or so they contact the turf to de-thatch and to mimic the verti-cut effect.



Groom Artificial Turf. Raise fibers. Loosen and redistribute infill.

Did You Know...|nfill Can Fly! Sure you did. You've seen it on TV. You'll also see "infill in motion" when grooming synthetic turf.



- Stands up matted down Fibers.
- Relieves Compaction and Redistributes Infill.
- Exclusive "High Performance-Compact Broom Carriage" unmatched performance. And our broom "Doesn't Hop" !!
- Broom includes 6 individual brushes housed in carriage.
- Optional Rear Magnet removes ferrous metal objects.
- Synthetic bristles designed for turf, resist wear and will not rot.
- Brushes can be rotated and replaced when needed.
- Two Rows of Spring Tines are completely adjustable. You decide how much contact (if any) you want with the turf.
- Can be used to De-thatch.



Optional Magnet MGMT-7200 72" wide.

Aluminum housing for Neodymium N52 Rare Earth Magnets. Strongest available. Includes adjustable height anti scalp turf wheels. Removes ferrous debris while grooming. If you're comparing groomers be sure to ask what type of magnets are used. For example: Other machines use less expensive ceramic magnets. Our neodymium magnets are 10 times stronger than ceramic!

What's Hiding in Your Turf?

Ferrous metal objects create hidden dangers in turf.

Remove debris while grooming.

Strongest Magnet on the Market!



5 Electric Lift Systems & How They Work



Battery On Groomer

Does not use

Tow Machine

Battery.

Does not use Tow Machine

Battery.

12 Volt Battery

On Groomer

WR. Battery on Groomer.

Wireless Remote Control. 12V Battery and Elec System On-Board the Groomer.

No wires to attach to your Tow Machine. 12 Volt battery, wireless transmitter & receiver system, 2.0 amp battery charger, and battery monitor. Great choice for ease of use, convenience, and all day use. Includes emergency 11.5 ft. long all-in-one Rocker Switch & Cord (use as emergency / temporary backup control).

2 Volt Battery On Groomer Note: SG system also has a 12v battery on board the groomer.



SG22

Groomer

Battery On SG. Battery on Groomer.

Corded SwitchBox Control. 12V Battery On-Board Groomer. Does not use 12v battery

of your Tow Machine. Corded system. Weather sealed SwitchBox. 2 Extension Wires to work for all tow machines. Groomer tongue wire connects to extension wire at rear of tow machine. Good choice for all day use. Note: WR is the only other system that has a 12 volt battery on-board the groomer.

Can also be used as a backup operating system.



Tow Machine

Uses Battery of SB. Corded SwitchBox.

Uses Tow Machine 12v Battery.

Corded system with Weather sealed SwitchBox.

Power Harness connects to tow machine battery with portable alligator clamps. Includes 2 Extension Wires to work for all tow machines. Groomer tongue wire connects to extension wire at rear of tow machine.

Can also be used as a backup operating system.



Tow Machine

Uses Battery of PW. "Portable" Wireless Remote Control.

Uses Tow Machine 12v Battery. Same wireless control system as the "WR".

Power Harness connects to tow machine battery with portable alligator clamps. Power supplied to wireless receiver on groomer through groomer tongue wire connected at rear of tow machine. Includes emergency 11.5 ft. long all-in-one Rocker Switch & Cord (use as emergency / temporary backup control). Can also be used as a backup operating system.



Tow Machine

Uses Battery of HW. Hard-Wired into your tow machine. Uses Tow Machine 12v Battery. Dash-Mounted Rocker Switch

to control the electric lift. You dedicate a specific tow machine to be wired. Includes all wiring, switch, connectors, etc. for one tow machine. Want to use other tow machines when needed? Order optional partial wiring system to wire another tow machine or order an optional backup system. Note: your tow machine must have a knock-out switch location available on the dash for rocker switch or cut your own opening.




"WR" Wireless Remote Control + On-Board 12v Electric System

Wireless remote operator control with On-board 12v battery provides the ultimate in user ease and flexibility. Exclusive wireless remote transmitter and receiver, on-board 2.0 amp battery charger, battery monitor (alerts when battery needs charged), plastic battery case, sealed connectors, emergency bypass rocker switch & cord, and 2 manual tools.

Most Popular

Nothing Else like it on the market!

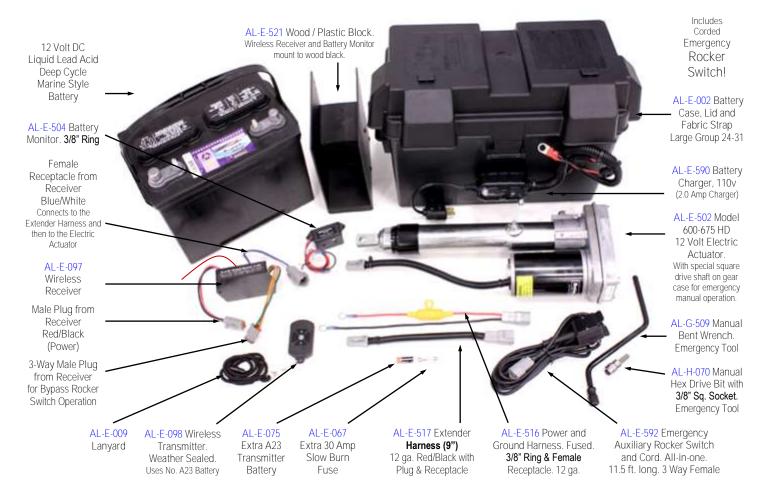

Advantages: Exclusive "one-of-a-kind" control system....only offered by Heying Company! Made in USA!

Wireless Remote (hand held transmitter) Control - the Ultimate in user convenience (receiver mounts inside battery compartment). The wireless remote control has immediate response when a button is pressed. It never goes to sleep like many other wireless systems. Pull with a variety of tow machines. Can quickly switch from one tow machine to another. On-board electric system is completely self contained. On-board 2.0 amp battery charger has safe technology so it can (and should) be plugged in whenever the groomer is not being used. On-board battery monitor emits an audible alert when the battery needs to be charged.

No wiring needed to user tow machine. No Cords.

Corded Auxiliary Switch (and cord) included. 11 ft. long. Use to operate electric lift if transmitter is misplaced. Stores inside battery case. On-board electric system also makes it easier to move the groomer even when it's not connected to a tow machine (such as inside a storage shed).

Disadvantage: (Not really a disadvantage) User needs to keep the on-board battery charged. Just plug in the battery charger (use a standard 120v cord).



Worried about losing the Transmitter? System comes with 11.5 ft. long Corded Rocker Switch and two (2) manual wrenches that can be used in an emergency to manually raise / lower the electric cylinder. Consider a "Backup Control System". Customers who run tournaments or those who just want the peace of mind that they can operate the groomer if they have any problems (misplaced transmitter, dead battery, etc.)....will consider the "SB" Backup Operating System. The "SB" System is portable and can connect to any tow machine 12v battery. It's not used on a daily basis. Rather, it's stored, and used only when there is a problem with the main control system. It will override / bypass the entire original electric system (except the Cylinder).



Corded SwitchBox Control powered by 12V Battery On-Board the Groomer.

system. 5G

12 volt battery on-board the groomer means your tow machine battery is not used to power the system. This is a good choice for those who need to use the groomer all day long - **so they don't wear down their** tow machine battery. *Note: WR is the only other system that has a 12 volt battery on-board the groomer.*

AL-E-521 Wood / Plastic Block. Battery Monitor mount to wood black. 12 Volt DC Liquid Lead Acid AL-E-002 Battery Deep Cycle Case, Lid and Marine Style Fabric Strap Battery Large Group 24-31 AL-E-504 Battery AL-E-590 Battery Monitor Charger, 110v 3/8" Ring Terminals (2.0 Amp Charger) AL-E-587 12 ft. AL-E-502 Model Extension Wire 600-675 HD (often used for 12 Volt Electric larger tow Actuator. machines). With special square drive shaft on gear AL-E-588 5 ft. case for emergency manual operation. Extension Wire (used for shorter tow machines such as garden tractors, AL-E-586 4-wheelers, etc.) 82" Groomer Tongue Wire / AL-G-107 Cable Power Harness Clamp .406 x .50 4 x 1 AL-G-015 Cable Clamp .406 x 1.00 AL-G-509 Manual AL-G-108 Cable Bent Wrench. Clamp .265 x .50

How it Works. Power starts at the groomer battery. The 4 Conductor Tongue & Power Wire runs 2 way power towards the operator (through whichever extension wire is used) and onto the SwitchBox. From switch 2 way control is returned to the actuator on groomer.

AL-E-035

Ring

Terminals

3/8"

AL-E-038

Butt

Splice

14-16

AL-E-585

Switch Box. 4 x 1

Power & Control

AL-E-067

Extra 30

Amp Slow

Burn Fuse

The 12 ft. length extension wire is popular with customers who have UTV type tow machines. The 5 ft. length extension wire is popular with customers who have shorter tow machines such as garden tractors.



AL-G-094

Zip Ties

AL-H-070 Manual

Hex Drive Bit with

3/8" Sq. Socket.

Emergency Tool

Advantages: 12 volt electric system completely on-board the groomer provides all the power needed for lift / lower functions.

Your tow machine battery is not needed to power the groomer electric lift (doesn't wear down your tow machine battery). Provides all day use.

On-board 2.0 amp battery charger has safe technology so it can (and should) be plugged in whenever the groomer is not being used.

AL-G-012

Zip Tie

Inserts

AL-E-517 Extender

Harness (9")

12 ga. Red/Black with

Plug & Receptacle

On-board battery monitor emits audible alert when the battery needs to be charged.


Versatile, Easy to Use, and Portable. Pull groomer with a variety of tow machines. Made in USA!

Disadvantages: Inconvenience of having cords. Must pay constant attention to protecting the cords during use.

Note: This SG System is one of two systems we offer with 12 volt battery on-board the groomer (WR is the other).



Emergency Tool



SB

SB AL-E-002 Battery Case, Lid and Fabric Strap AL-E-105 Large Group 24-31 Convoluted Split Loom. 8 ft. x .350 Use to protect Power and Ground Wire Harness. AL-E-502 Model 600-675 Actuator AL-E-578 12 ft. (with 12-14 Male Plug) Extension Wire (often used for larger tow machines). AL-G-509 Manual Bent Wrench. **Emergency Tool** AL-E-577 5 ft. Extension Wire AL-H-070 Manual (often used for Hex Drive Bit with shorter tow 3/8" Sq. Socket. machines such as Emergency Tool garden tractors, 4-wheelers, etc.) AL-G-107 Cable AL-E-101 Clamps .406 x .50 SwitchBox AL-G-015 Cable 2 x 2 Clamp .406 x 1.00 Power & Control AL-G-094 AL-G-012 AL-E-576 AL-E-067 AL-E-035 AL-E-038 AL-E-575 Fused Power & Zip Ties Zip Tie Ground Wire Harness with Groomer Tonque Extra 30 Butt Ring Wire (70") with Amp Slow Terminals Inserts Alligator Clamps & Female Splice

Advantages:

Versatility to quickly switch to a different tow machine (control system is portable). SwitchBox is completely weather sealed (unlike anything on the market). Made in USA!

Two "Cylinder Extension Wires" included (5 ft. and 121 ft.) so the user can decide which works best for their use.

Ability to be used as a primary (everyday) lift control system or as a backup to other operator lift control systems (use when needed). No battery on-board the groomer to worry about (but it does need power from your 12v tow machine).

Receptacle. 8 ft. long.

Split Loom

Burn Fuse

3/8"

14-16

We include a battery compartment (even though a battery is not included). Very useful to store control parts and tools.

Disadvantages:

Inconvenience of having cords. Must pay constant attention to protecting the cords during use.

Big Users (who have lots of grooming) could experience this system wearing down the battery of their tow machine.

This system requires power from user tow machine. User cannot raise and lower implements without being attached to tow machine for power. Since power is supplied by a tow machine the groomer is more difficult to move around storage shed, etc.

Note: We have 2 Systems (WR and SG) that provide 12 volt power from the groomer so they don't need power from your tow machine.





"PW" Portable Wireless Remote Control.



Same wireless Transmitter - Receiver as the "WR" but uses 12v battery of user's Tow Machine for power.

Includes portable power harness that connects to tow machine battery. The groomer also has a connection harness.

These two wires connect at the rear of the tow machine to power the electric system.

"Worried about losing the Transmitter"? We include a corded auxiliary rocker switch & cord that can be used as a temporary backup control of the electric lift if you misplace the wireless transmitter.

Unlike anything else on the market!



Advantages:

Wireless Remote Control System for "the Ultimate in User Convenience" at a lower price than the "WR".

The wireless remote control has immediate response when a button is pressed. It never goes to sleep like many other wireless systems.

Lighter weight than the "WR" system (No battery so is not as heavy to lift the tongue). Advantage especially for those who want the

Spring Tine Scarifier on their groomer (Spring Tine Scarifier mounts to front of machine thus adding weight to the Tongue).

Spring Tine Scarnier on their groomer (Spring Tine Scarnier mounts to from on machine thus adding weight to the Tongue, Portable System. Pull with a variety of 12 volt tow machines. Can guickly switch from one tow machine to another.

Disadvantages:

Inconvenience having to plug in the connector (when connecting to tow machine) and unplugging connector behind tow machine (when unhooking). For some big users (lot of fields or lots of grooming on fewer fields) this system could wear down the battery of the tow machine.

If this is a concern then consider the "WR" system.

This system requires power from user tow machine 12v battery. User can't raise or lower implements without being attached to tow machine for power. Note: The "WR" is the only system that does not require power from user tow machine.



Worried about losing the Transmitter? System comes with 11.5 ft. long Corded Rocker Switch and two (2) manual wrenches that can be used in an emergency to manually raise / lower the electric cylinder. **Consider a "Backup Control System".** Customers who run tournaments or those who just want the peace of mind that they can operate the groomer if they have any problems (misplaced transmitter, dead battery, etc.)....will consider the "SB" Backup Operating System. The "SB" System is portable and can connect to any tow machine 12v battery. It's not used on a daily basis. Rather, it's stored, and used only when there is a problem with the main control system. It will override / bypass the entire original electric system (except the Cylinder).



"HW" Hard-Wired Operator Lift Control System (12v only)

System uses 12v battery of your tow machine. Includes all necessary wiring, in-dash mountable rocker switch, electric cylinder (actuator), fuse holder, fuse, wire, connectors, protective split loom, cable clamps, and zip ties.

For users who have a tow machine with a dash panel that will accept a Rocker Switch, who want the convenience of a dash mounted rocker switch, and who want to always use the same tow machine to pull and operate the groomer this is the operator system of choice. Note: Optional additional wiring package available for users who wish to wire more than one tow machine to pull and operate the groomer. See optional "HW" tow machine wiring package information.

AL-E-002 Battery AL-E-102 Case, Lid and 8 ft. of .350 Fabric Strap Convoluted Large Group 24-31 Split Loom. Use to protect AL-E-502 Model Power Harness. 600-675 HD 12 Volt Electric AL-E-103 Actuator 16 ft. of .350 With special square Convoluted drive shaft on gear case Split Loom. for emergency manual Use to protect wire operation. when installed inside tow ma-AL-E-011 Dash chine Mount Rocker Switch Momentary 4 Contact. Fits hole size range of:.820" AL-E-512 to .830" wide X .142" Tongue Wire to .148" high. 70". Female Receptacle one end and Red AL-G-509 Manual SMS Connector Bent Wrench. at other end. AL-G-094 Zip Ties **Emergency Tool** AL-E-014 Rubber Cover AL-H-070 Manual Hex Drive Bit with 3/8" Sq. Socket. AL-E-513 16 ft. Switch to Rear of AL-E-514 8 ft. Power Harness. AL-E-067 AL-E-089 AL-E-029 AL-G-012 AL-G-107 AL-G-015 **Emergency Tool**

Advantages: Rocker Switch is installed on dash of Tow Machine for convenience.

Easy to use connectors at the groomer tongue and rear of tow machine.

Tow Machine Wire. Blue push-on

connectors & Red SMS Connector.

AL-E-014 Rubber Cover.

Disadvantages: User must dedicate a specific tow machine to always pull the groomer. Or, order additional wiring packages for more tow machines. You can also consider an optional SB or SG or PW System to use as a portable backup for when the original dedicated tow machine is not available to pull the groomer. See optional accessories):

Extra

Fuse

Big Users (who have lots of grooming) could experience this system wearing down the battery of their tow machine.

Switch to Battery of Tow

Machine. 3/8" Ring Terminals

and Red SMS Connector

Since power is supplied by a tow machine the groomer is more difficult to move around storage shed, etc.

Note: The "WR" and "SG" systems have 12v batteries on board the groomer. They do not need to connect to the user's Tow Machine to power the groomer.



"HW". Concerned about having only one Tow Machine able to operate the groomer? Consider an additional "HW" Wiring package (optional) to wire a second Tow Machine. Or consider a "Backup Control System". Customers who run tournaments or those who just want the peace of mind that they can operate the groomer if they have any problems (misplaced transmitter, dead battery, etc.)....will consider the "SB" Backup Operating System. The "SB" System is portable and can connect to any tow machine 12v battery. It's not used on a daily basis. Rather, it's stored, and used only when there is a problem with the main control system. It will override / bypass the entire original electric system (except the Cylinder).

Push-On

Connectors

Crimp Only

Push-On

Connectors

Heat Shrink

7ip Tie

Push in

Inserts

Cable

Clamp

.406 x .50

Cable

Clamp

.406 x 1.00



Alton, IA 51003 Ph. 712.756.8847 Fax 712.756.8849 Heying Company www.HeyingCompany.com

Made in USA Copyright Heying Enterprises

WARRANTY (All Groomers from Heying Company)

Heying Company machines carry the following limited warranty, from date of possession to the end user, on parts and workmanship, and to be free of defects, under normal and intended use and service conditions, of: 3 years parts and workmanship on Heying Company manufactured parts.

One (1) Year on parts not manufactured by Heying Company, including but not limited to:
Wheels, brushes, electrical cylinder (actuator), electric system parts, wireless remote control systems, switches, batteries, chargers, etc.

Excluded is this warranty is Normal Wear and Tear on Parts resulting from natural and intended use.

Heying Company's obligation under this warranty is limited to replacement or repair at the manufacturer's option.

Proof of purchase must accompany any and all warranty claims to Heying Company.

This warranty does not extend to any product or damage to a product caused by, or attributed to freight damage, abuse, misuse, improper or abnormal usage, improper storage or changes and repairs unauthorized by Heying Company including to towing machines.

All freight damage claims must be made immediately and directly to the freight carrier by the purchaser or end user. It is not the responsibility of Heying Company to report damaged freight to freight companies. We guarantee that all shipments leave our facilities free from damage.

Heying Company is not liable for direct or indirect, special or consequential damages arising from, or in connection with, the use or performance of the product or damages with respect to any economic loss, personal injury, loss or damage to property, loss of revenues or profits, or loss of enjoyment.

Any full machine, assembly or individual part returned to Heying Company for refund, replacement or repair must have sufficient proof of purchase included, prior written authorization from Heying Company, be packaged as instructed by Heying Company, and have all freight charges prepaid.

Product returns are subject to re-painting and re-stocking charges.

No other warranty beyond that specifically stated above is authorized or intended by Heying Company.

Choosing a tow machine is the sole responsibility of the user. User should always consult with the towing machine manufacturer for towing capacity and suitability. Heying Company makes no claim and carries no responsibility as to the ability or capacity of any towing machine to be used.

Acknowledgment and Assumption of Risk. Release of Liability; Indemnification.

Rear attach groomers are designed to attach directly to a customer's vehicle, tractor, etc. (and will not include a wheeled frame or tongue for pulling). The desire for direct attach groomers comes from customers needing "convenience". Even though these types of groomers could prove to be somewhat less effective there are customers who understand this and are willing to sacrifice some function to gain convenience. Examples of vehicles used for "direct attach groomers". Utility vehicles like the JD Gator TX. UTV's, Side by Sides, Small Tractors, etc. Heying Company is not responsible for damage or harm to vehicles, or to person's operating the vehicle and / or groomer. Customer agrees that they are solely responsible to attach to and operate their vehicle or Tow Machine, they understand they are responsible to assure the safety of operators, and that they willingly attach this groomer to their tow machine with full knowledge that they are responsible to make sure it will not cause damage to their vehicle or any person operating the vehicle. Customer acknowledges that by ordering a groomer they have read and understand all aspects of their responsibility of pulling, attaching, and operating all equipment.

Participant acknowledges that operating motorized vehicles and attached equipment can be an extreme test of a person's physical and mental limits and carries with it the potential for death, serious injury and property loss. The risks include, but are not limited to, those caused by terrain, vehicular traffic and the actions of other people including, facilities, temperature, weather, and physical and mental fitness. These risks are not only inherent to equipment operators but are also present for volunteers and anyone else desiring to participate in these activities. Participants acknowledge, agrees and represent that they will inspect the equipment to be used or operated by him/her and further agrees and warrants that, if at any time, he/she is in or about equipment will immediately advise appropriate officials of such and if necessary leave the area or equipment and/or refuse to further participate in these activities.

Release of Liability; Indemnification; Acknowledgement of Risk. Participant hereby waives, releases and discharges, on behalf of Participant and Participant's executors, administrators, heirs, next of kin, successors and assigns, Heying Enterprises and authorized dealers, and their respective directors, officers, employees, volunteers, agents from any and all liability for customer's death, disability, personal injury, property damage, property theft, lost income or any other losses, costs or actions of any kind whatsoever, which hereafter may directly or indirectly accrue to customer through training or participating in the act of use of Heying Equipment and their Tow Vehicles. Customer agrees to indemnify and hold the Releasees harmless from and against any and all liability, loss, damage or injury as well as all costs and expenses (including attorneys' fees and costs of any suit related thereto), suffered or incurred by Releasees, to the extent arising from any of customer actions whatsoever whether now or in the future, including but not limited to negligent, intentional or reckless misconduct, acts or omissions. Participant understands that there are inherent hazardous risks associated with the operation of equipment which could include serious injury or death, and customer freely assumes the risk of any and all injuries that customer may sustain while using this equipment. Customer agrees that no person with insufficient physical fitness, alertness, sobriety, vision, or medical ability shall operate the equipment and that all operators shall have adequate training before being allowed to operate said equipment. Governing Law. Except to the extent that this Agreement may be governed by any federal law, this Agreement shall be governed by, construed and interpreted under, and enforced exclusively in accordance with the laws of the State of lowa in the United States.

